


Protek 3005B

Protek 3005B 0-30V @0-5 Amps Power Supply

Features & Specifications

- Constant Voltage or Constant Current operation
- Excellent load, line and ripple specifications
- Fully isolated outputs allow for series connections
- Coarse and fine voltage controls for accurate voltage and current settings
- Indicators for constant voltage, constant current and overload operation
- Noise free linear technology for servicing RF circuits and high sensitivity amplifiers
- 3 Digit LED display for both current and voltage

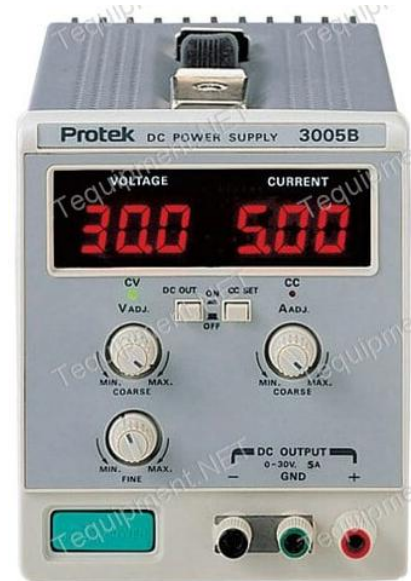

| | |
|-----------------------|--|
| Output Volts | 0 to ± 30 V DC |
| Output Amps | 0 to ± 5 Amps |
| Constant Voltage Mode | Load and Line Regulation: 0.02% + 2mV Ripple and Noise: < 1mV RMS |
| Constant Current Mode | Load Regulation: 0.05% + 5mA Line Regulation: 0.05% + 0.25mA Ripple and Noise: ≤ 2 mA RMS |
| Digital Display | Volts: 100mV; Amps: 10mA |
| Resolution | Accuracy: $\pm (0.5\% + 3D)$ |
| AC Input Voltage | 120V / 220V selectable |
| Power Consumption | 33VA |
| Operating Temperature | 0 to 32°C (32 to 90°F) |
| Size | 6.3" H x 5.0" W x 13.0" D |
| Weight | 15 lbs. |
| Supplied Accessories | Manual, Power cord, Test leads |