

# LTX-12



## DEVICE

# 12 GHz Lightwave Transmitter Modulator for RFoF

## OVERVIEW

The Optilab LTX-12 is a high performance Lightwave Transmitter Modulator designed for analog photonics applications from 10 MHz to 12 GHz. This unit includes a 10 GHz optical intensity modulator and an Automatic Bias Control (ABC) board with four different operating modes. The integrated internal TWL laser makes it a versatile solution for RFoF system integration. Contact Optilab for more information.


## FEATURES


- 8 GHz S21 bandwidth modulator
- 1527 nm to 1567 nm wavelength range
- Automatic Bias Control w/ 4 mode operation
- Internal TWL laser up to 40 mW
- Single 12V power supply required (not included)
- Customizable Options:
  - Low Drive Voltage
  - PM output
  - High Extinction Ratio (> 30 dB)
  - Temp. Qualified (-55°C to +75°C)

## USE IN

- Picosecond pulse generation
- Optical communications to 25 Gb/s
- 12 GHz RFoF transmission
- Analog photonics
- RF/IF signal distribution
- Satellite communication

## FUNCTIONAL DIAGRAM

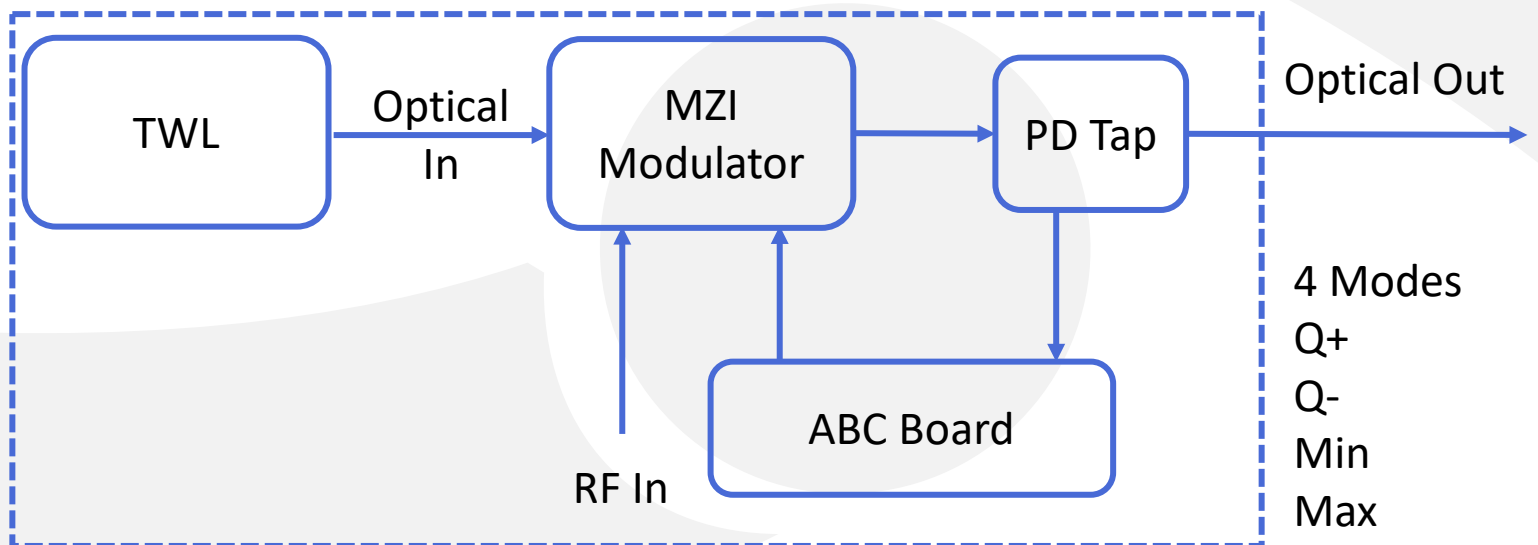

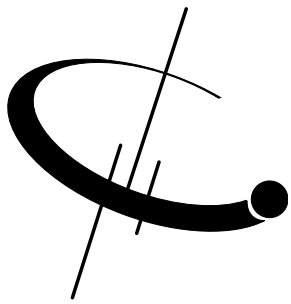

# LTX-12

## SPECIFICATIONS

Operating Wavelength	1520 nm to 1610 nm
Laser Source	Tunable Wavelength Laser, 1526 nm to 1567nm
Laser Power Level	Up to 40mW
RF Return Loss	> 15 dB @ 10 GHz
Impedance	50Ω
Operating Frequency Range	10 MHz to 12 GHz
Input RF Voltage	27 dBm max.
Optical Output Level	6.5 dBm typ. With 20 mW DFB
S21 Bandwidth	3 dB, 8 GHz typ.
Modulator Bias Mode	4 Automatic bias control modes, selectable by software
Extinction Ratio	25 dB typ.; > 30 dB (HE version)
Modulator Voltage $V_{PI}$	7 V typ. @ 10 GHz

## GENERAL


## MECHANICAL

Operating Temperature (standard)	-30 °C to +60 °C
Operating Temperature (TQ version)	-55 °C to +75 °C
Storage Temperature	-60 °C to +90 °C
Power Supply Requirements	AC Power Cord, +12 V DC
Optical Connector	FC/APC
Fiber Type	SMF-28 output; PANDA output (PM version)
RF Input Connector	K connector
Power Connector	4 Pin Molex
Remote Control	USB 2.0 software included
Alarm	LED bias mode status
Dimensions	220 mm x 119 mm x 27 mm

## BIAS CONTROL MODE



Mode	Operation Conditions
Q+	Set to quadrature point of positive slope for linear analog modulation
Q-	Set to quadrature point of negative slope for linear analog modulation
Min.	Set to min. point of operation for pulse generation or digital modulation
Max.	Set to max. point of operation for pulse generation or digital modulation



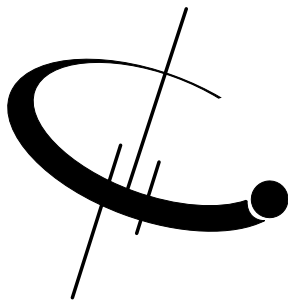


# LTX-12


TYPICAL S21 AND S11 BANDWIDTH

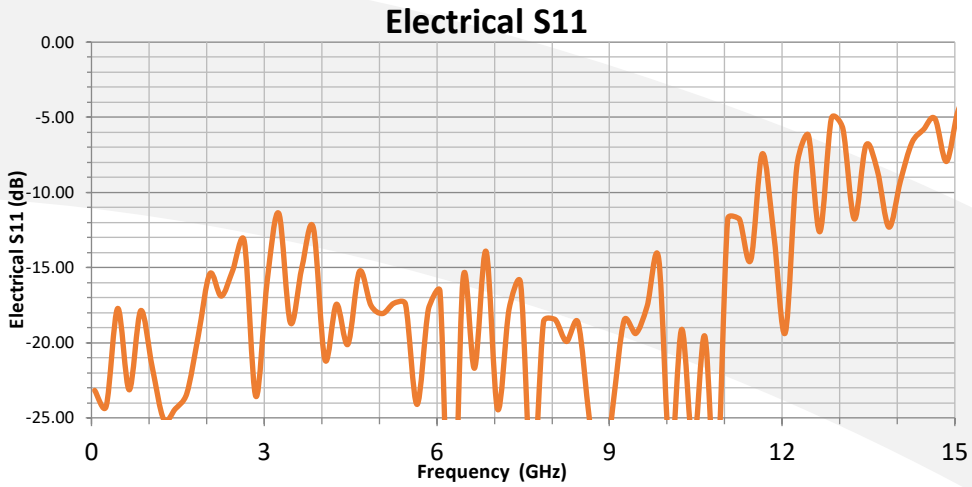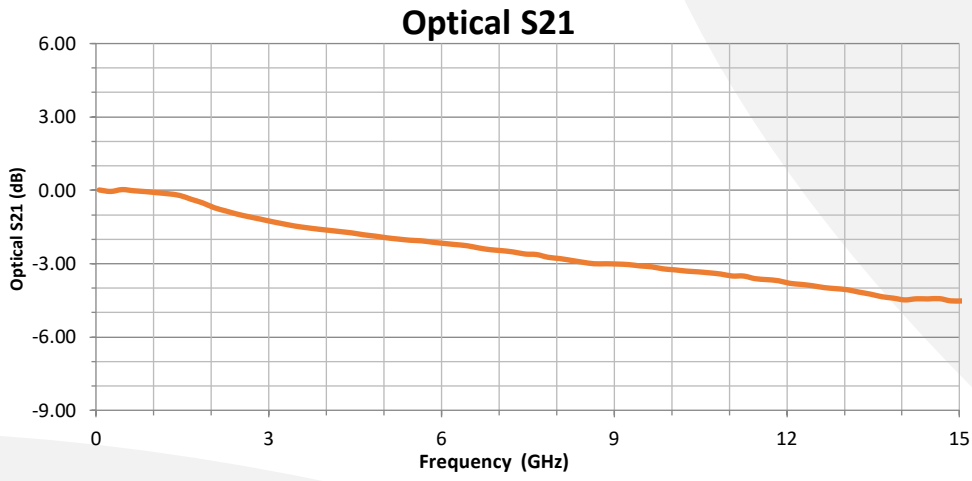

## BIAS SETTING MODES FOR LTX

Based on sophisticated phase measurement of this small dither signal, LTX-12 provides four selectable operating modes: quadrature (Quad +), inverted quadrature (Quad -), minimum (Min), or maximum (Max) points.

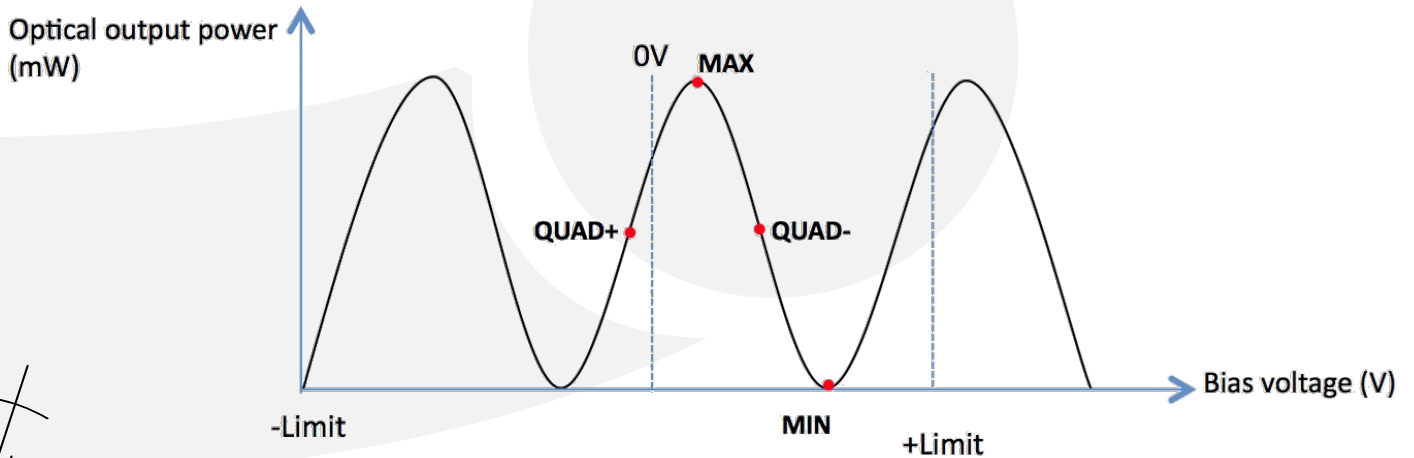

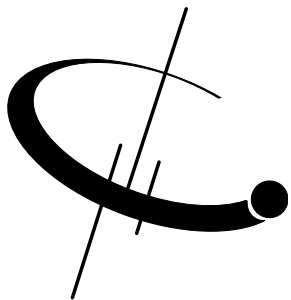


# LTX-12


ORDERING OPTIONS

**LTX-12-XX**

**XX** PM: Polarization Maintaining

TYPICAL S21 BANDWIDTH FOR LD VERSION

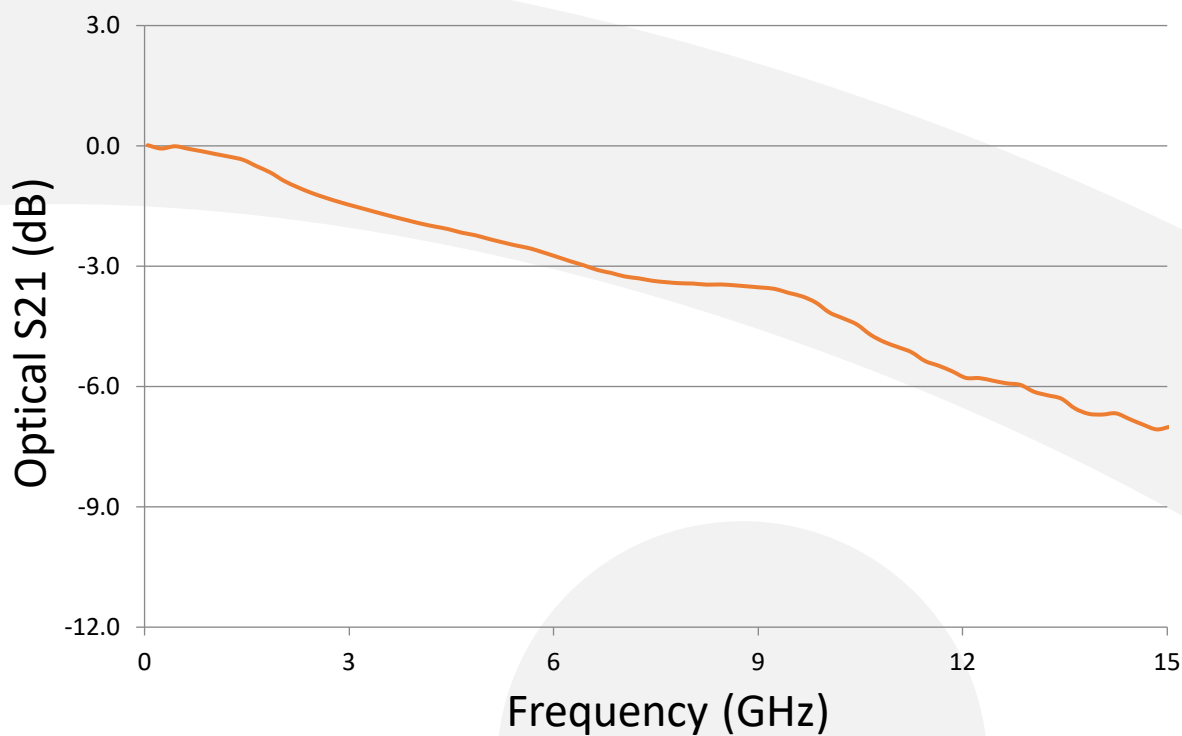

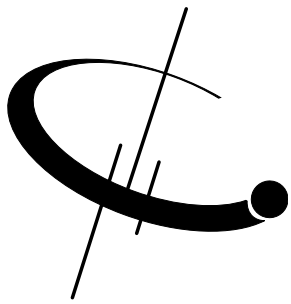

# LTX-12

## MECHANICAL DRAWING

