

# 0203 PM Fused Coupler

C3600-P



## 2x2 780 nm PM Fused Coupler, 1/99

The coupler is a 2x2 780 nm 1/99 PM fused coupler. The coupler offers very low insertion loss and high extinction ratio. It can be used for fiber sensor, power monitor and coherent communication.


### FEATURES

- High Stability & Reliability
- Low Insertion Loss

### USE IN

- Coherent Communication
- Power Monitor
- Fiber Sensor

### MECHANICAL DRAWING

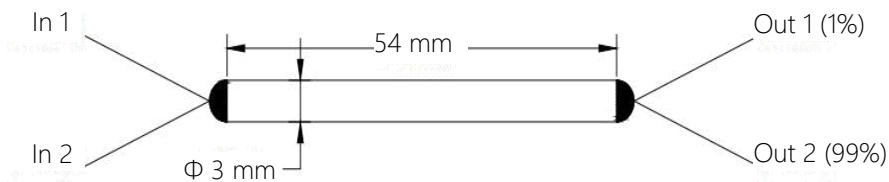

Center Wavelength	780 nm
Operating Bandwidth	±10 nm
Excess Loss	0.8 dB max.
Extinction Ratio	18 dB min.
Directivity	50 dB min.
Return Loss	50 dB min.
Power Handling	2 W max.
Fiber Type	PM Panda Fiber
Dimension	3x3x54 mm
Operating Temperature	-5°C to +75°C
Storage Temperature	-40°C to +85°C
Splitting Ratio Tolerance	±0.3%
Axis Alignment	Both Axis Working

\* With connectors, the handling power is 1 W only, IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower.

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.  
**Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**