

0201 Fused Coupler

C1008-S



1x2 Dual Coupler (1480 nm, 2%/98%), (1580 nm, 2%/98%)

The coupler is a 1x2 dual 1480 nm, 2%/98%, 1580 nm, 2%/98% coupler. This highly reliable coupler offers very low insertion loss, low polarization dependence and excellent environmental stability. It can be used for optical communication, HFC & fiber sensors, fiber laser, optical amplifier and photonics integration.


FEATURES

- Low Excess Loss
- Low Insertion Loss
- Low PDL
- High Stability and Reliability

USE IN

- Optical Communication
- Fiber Laser
- Optical Amplifier
- HFC & Fiber Sensors

FUNCTIONAL DIAGRAM

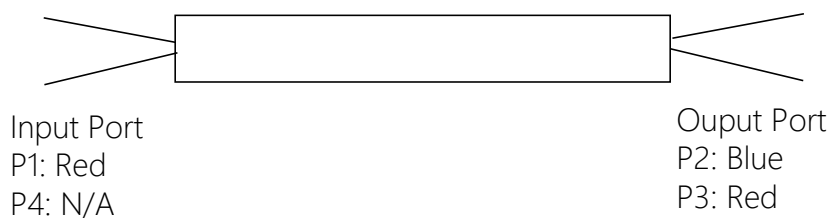

Insertion Loss P1-P2	0.05 dB min.; 0.2 dB max.
Insertion Loss P1-P3	16 dB min.; 18 dB max.
Wavelength Dep. Loss P1-P2	0.1 dB max.
Wavelength Dep. Loss P1-P3	0.25 dB max.

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.
1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.
2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.