

W5101-S



980 nm/1064 nm FWDM with LPF

This FWDM can achieve system monitoring. It provides wide operating wavelength range, low insertion loss, high channel isolation, wide operating wavelength range, wide pass band, high stability and reliability and epoxy free optical path. It can be used for transmitters and fiber lasers, WDM network system, fiberoptic instruments and fiber optical amplifier.


FEATURES

- Wide Operating Wavelength Range
- Low Insertion Loss
- Ultra Flat Wide Passband
- High Channel Isolation
- High Stability and Reliability
- Epoxy-free on Optical Path

USE IN

- System Monitoring
- Transmitters and Fiber Lasers
- Fiber Optic Instruments
- Fiber Optical Amplifier
- WDM Network

MECHANICAL DRAWING

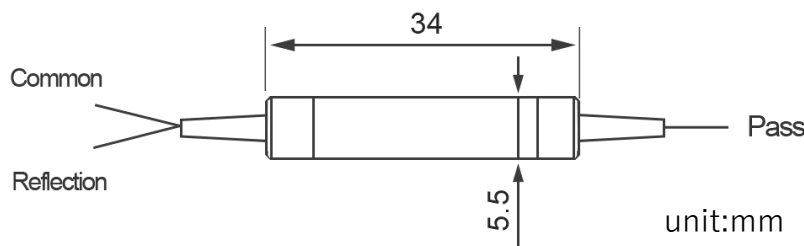

Pass Wavelength	960 nm to 990 nm or 1040 nm to 1090 nm
Reflection Wavelength	1040 nm to 1090 nm or 960 nm to 990 nm
Pass Insertion Loss	0.80 dB max.
Reflection Insertion Loss	0.60 dB max.
Pass Channel Isolation	25 dB min.
Reflection Isolation	13 dB min.
Polarization Dependent Loss	0.10 dB max.
Return Loss	50 dB min.
Wavelength Thermal Stability	0.003 nm/°C max.
Insertion Loss Thermal Stability	0.005 dB/°C max.
Channel Flatness	0.30 dB max.
Directivity	55 dB min.
Power Handling	300 mW max.
Operating Temperature	0°C to +70°C
Storage Temperature	-40°C to +85°C
Dimension	5.5x5.5xL34 mm

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.

1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.

2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.