

W1039-S



1x2 Thin Film Based WDM Combiner: 1500 nm to 1520 nm/1529 nm to 1565 nm

This WDM based pump/signal combiner utilizes thin-film filter technology to combine the pump power with the input signal. It is housed in a high-power handling metal package.


FEATURES

- Low Insertion Loss
- Low PDL
- Negligible PMD
- High Stability and Reliability

USE IN

- Building Broadband
- Low-noise EDFAs
- Raman Amplifiers for Ultra-long Haul Networks

MECHANICAL DRAWING

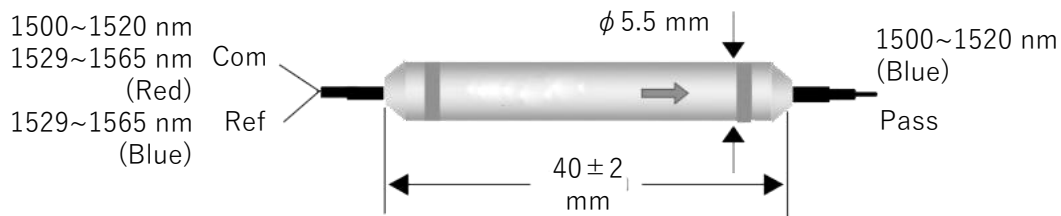

Pass Channel C→P	Wavelength Range λ_p	1500 nm to 1520 nm
	Insertion Loss	1.40 dB max.
	Flatness	0.60 dB max.
	Isolation@ λ_R	40 dB min.
	PDL	0.10 dB max.
	Directivity P→R	55 dB min.
Reflection Channel C→R	Wavelength Range λ_R	1529 nm to 1565 nm
	Insertion Loss	0.50 dB max.
	Flatness	0.10 dB max.
	Isolation@ λ_p	10 dB min.
	PDL	0.10 dB max.
	Directivity R→P	55 dB min.
Return Loss		50 dB min.
Dimension		5.5±0.2x5.5±0.2x40±2 mm

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.

1) Connector FC/APC, 900 μ m, 1 m by default for all devices except for high power devices.

2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.