

# 1905 Connect Adaptor

## FC ADAPTOR

### ADP1000



FC Fiber Optic Adaptor (Rectangular)

### ADP1100



FC Fiber Optic Adaptor (Square)

### ADP1200




FC Fiber Optic Adaptor (Oval)

### ADP1300



FC Fiber Optic Adaptor (Duplex)

### ADP2100

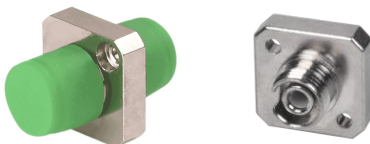

FC/APC Fiber Optic Adaptor

#### FEATURES

- FC Square, Rectangular, Square, Oval and Duplex Type Available
- Phosphor Bronze or Zirconia Sleeve
- Low Insertion Loss and Back Reflection Loss
- High Precision Alignment
- Compact Design
- Comply to ROHS Requirement

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.

**1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**

**2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.**