

# LTC-50-X



## 50 GHz Lightwave Transmitter Modulator for RFoF

### OVERVIEW

The Optilab LTC-50-X is a high performance Lightwave Transmitter Modulator designed for analog photonics applications from 10 MHz to 50 GHz. This unit includes a 50 GHz optical intensity modulator and an Automatic Bias Control (ABC) board with four different operating modes. The external laser source can be any polarization maintaining device, such as tunable laser, narrow linewidth laser, making it a versatile solution for RFoF system integration. Contact Optilab for more information.


### FEATURES


- 43 GHz S21 bandwidth modulator
- 1520 nm to 1610 nm wavelength range
- Automatic Bias Control w/ 4 mode operation
- Internal DFB laser up to 50 mW
- Customizable Options:
  - Low Drive Voltage
  - PM output
  - High Extinction Ratio (> 30 dB)
  - Temp. Qualified (-55°C to +75°C)

### USE IN

- Sub-nanosecond pulse generation
- Optical communications to 50 Gb/s
- 43 GHz RFoF transmission
- Analog photonics
- RF/IF signal distribution
- Satellite communication

### FUNCTIONAL DIAGRAM

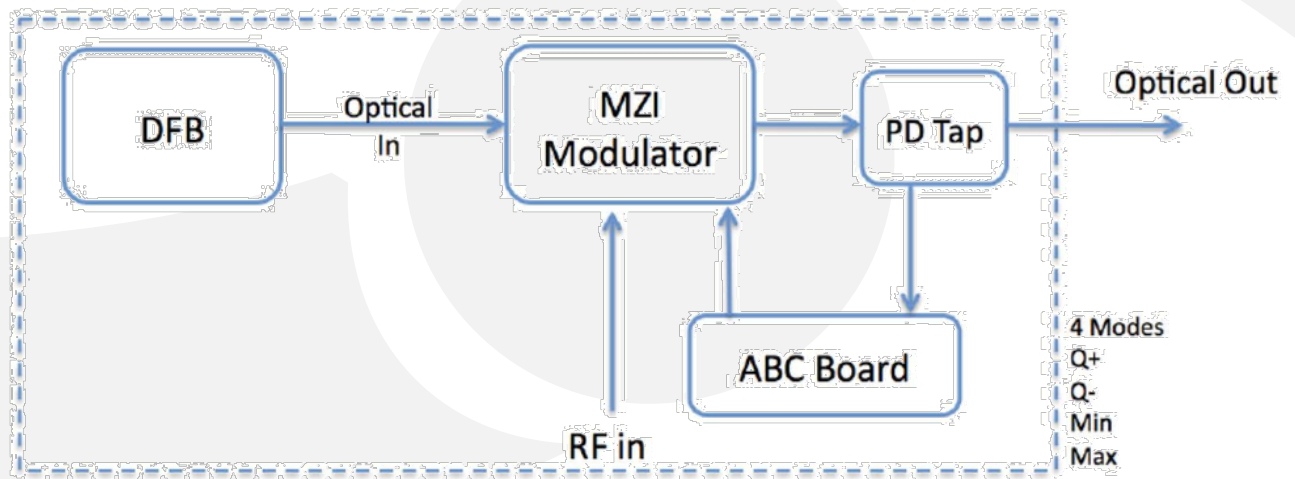

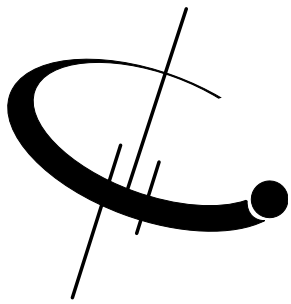

# LTC-50-X

## SPECIFICATIONS

Operating Wavelength	1520 nm to 1610 nm
Laser Source	Internal DFB laser, 1550 ± 10 nm; other wavelengths and narrow linewidth < 1 MHz are available
Laser Power Level	20, 30, 40, 50 mW
RF Return Loss	≤ -10 dB @ 20 GHz
Impedance	50Ω
Operating Frequency Range	10 MHz to 50 GHz
Input RF Voltage	27 dBm max.
Optical Output Level	6.5 dBm typ. With 20 mW DFB
S21 Bandwidth	≥ 30 GHz @ -3 dB; ≥ 50 GHz @ -6 dB
Modulator Bias Mode	4 Automatic bias control modes, selectable by software
Extinction Ratio	≥ 25 dB
Modulator Voltage V <sub>PI</sub>	2.7 V typ. @ 10 GHz; 4.9 V typ. @ 50 GHz

## GENERAL


Operating Temperature (standard)	-30 °C to +60 °C
Operating Temperature (TQ version)	-55 °C to +75 °C
Storage Temperature	-60 °C to +90 °C
Power Supply Requirements	AC Power Cord
Optical Connector	FC/APC
Fiber Type	SMF-28 output; PANDA output (PM version)
RF Input Connector	GPPD Connector
Power Connector	4 Pin Molex (AC Option Available)
Remote Control	USB 2.0 software included
Alarm	LED bias mode status
Dimensions	206 mm x 102.4 mm x 31.5 mm

## MECHANICAL

Mode	Operation Conditions
Q+	Set to quadrature point of positive slope for linear analog modulation
Q-	Set to quadrature point of negative slope for linear analog modulation
Min.	Set to min. point of operation for pulse generation or digital modulation
Max.	Set to max. point of operation for pulse generation or digital modulation



## BIAS CONTROL MODE






# LTC-50-X


TYPICAL S21 AND S11 BANDWIDTH

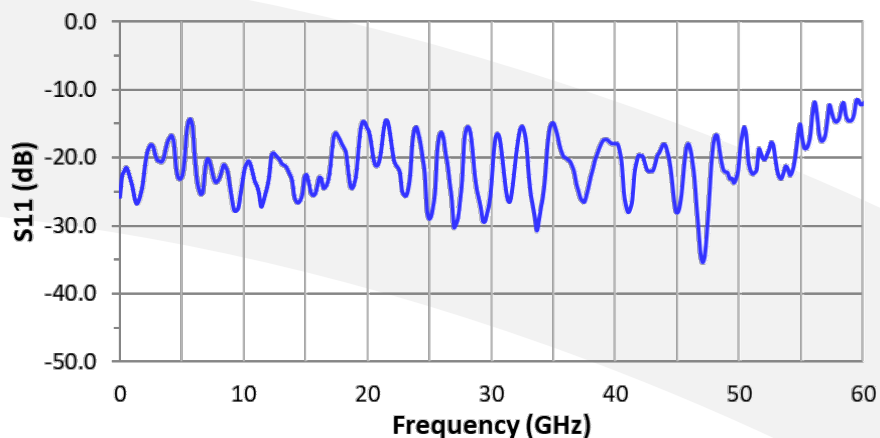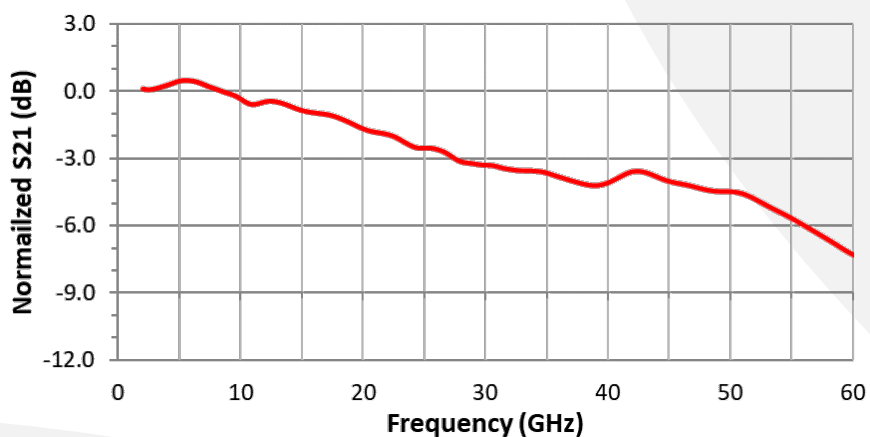

## BIAS SETTING MODES FOR LTC

Based on sophisticated phase measurement of this small dither signal, LTC-50-X provides four selectable operating modes: quadrature (Quad +), inverted quadrature (Quad -), minimum (Min), or maximum (Max) points.

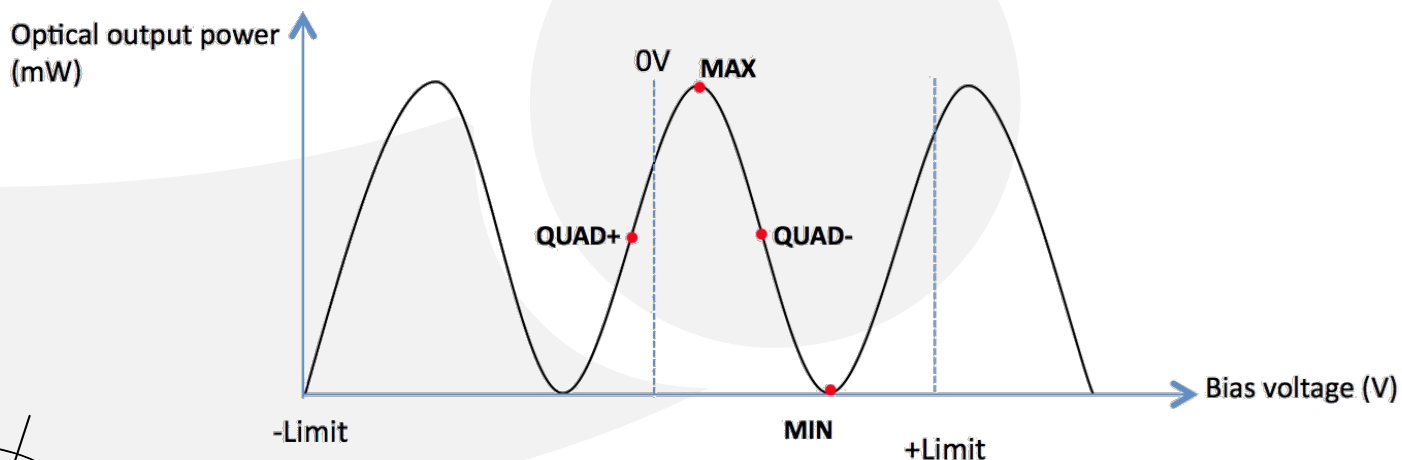



# LTC-50-X

## ORDERING OPTIONS

### LTC-50-X-YY

**YY** DC: DC +/- 5V Power Supply (Option 1)

AC: AC 100/240 VAC (Option 2)

Option 1 : DC +/- 5V



Option 2 : 100/240 VAC

