

## 0203 PM Fused Coupler

C2200-P



### 1x2 1550 nm PM Fused Coupler, 1/99

The coupler is an 1x2 1550 nm 1/99 PM fused coupler. This highly reliable coupler offers very low insertion loss and excellent environmental stability. It can be used for coherent communication, fiber sensors, power monitor.


#### FEATURES

- Low Insertion Loss
- High Stability and Reliability

#### USE IN

- Coherent Communication
- Fiber Sensors
- Power Monitor

#### MECHANICAL DRAWING

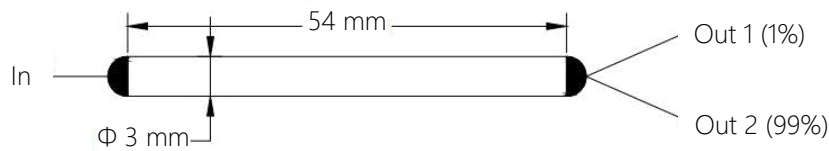

Operating Wavelength	1550 nm
Operating Bandwidth	±15 nm
Excess Loss	0.5 dB max.
Extinction Ratio	20 dB min.
Directivity	50 dB min.
Return Loss	50 dB min.
Power Handling (CW)	2 W max.
Fiber Type	PM Panda Fiber
Package Dimensions	3x3x54 mm
Operating Temperature	-5°C to +75°C
Storage Temperature	-40°C to +85°C
Splitting Ratio Tolerance	±0.3%
Axis Alignment	Both Axis Working

\* With connectors, the Max. handling power is 1 W only, IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower.

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.  
**Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**