

EDFA-I-R



EDFA-I-R

Inline Erbium-Doped Fiber Amplifier, Rackmount

The Optilab EDFA-I-R Erbium-Doped Fiber Amplifier (EDFA) is a high-gain, inline amplifier for the research and development of optical networks. By using a dual amplifier design, EDFA-I-B provides optical gain of up to 40 dB while maintaining low noise figure (NF). EDFA-I-R is a versatile amplifier that can be used for a wide range of input levels. Depending on the pump laser configuration, EDFA-I-R amplifier produces optical output levels from +18 dBm to +25 dBm with an input power level range from -15 dBm to +5 dBm. Contact Optilab for more information.


Features

- Reliable 980 nm and 1480 nm pump lasers
- Continuously regulated by microcontroller
- Forward and backward pumping
- Input power level range: -15 dBm to +5 dBm
- Optical gain up to +40 dB
- Automatic Current Control (ACC) (standard)
- Automatic Power Control (APC) (optional)
- LCD digital display and LED status indicators
- Software control through RS-232
- **3 year warranty standard**

Applications

- Test Instrumentation
- R&D

Functional Diagram

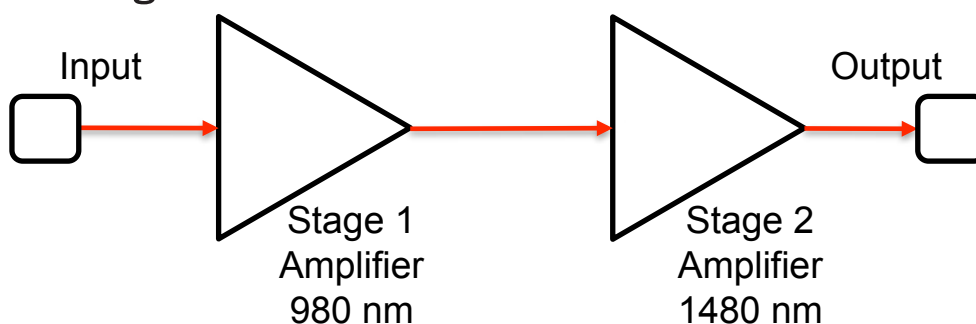

Inline Erbium-Doped Fiber Amplifier, Rackmount | EDFA-I-R

OPTIONS

EDFA-I-xx-R

xx Output power level +18 – +25 dBm

TECHNICAL INFO

For technical info and support:

sales@optilab.com

www.optilab.com

PHONE

Contact Optilab at:

1-888-553-3888 (toll-free)
1-602-343-1496 (direct, int'l)

Optilab, LLC
Phoenix, AZ, USA

WEB ORDER

To order this any many more products, please visit OEQuest.com and order online today.



Optilab Advantage

- Innovation
- Performance
- Quality
- Customization
- Warranty

Optical Specifications	
Operating Range	1530 nm to 1565 nm
Output Power Levels	+18 dBm to +25 dBm
Input Power Range	-12 dBm to +5 dBm
Optical Gain	Up to 37 dB
Noise Figure (NF)	5.2 dB max. @ -10 dBm Input
Number of Outputs	1 output standard
Optical Return Loss	50 dB min.
Input/Output Optical Isolation	30 dB min.
Polarization Mode Dispersion	1.0 ps max.
Polarization Dependent Gain	0.15 dB max.
Output Power Stability	0.15 dB over 8 hours
Input/Output Fiber Type	Corning SMF-28
Mechanical Specifications	
Operating Temperature	0° C to +50° C
Storage Temperature	-40° C to +70° C
Power Supply Requirements	80 - 240 V, 43 - 63 Hz AC
Power Consumption	60 W max.
Control	Pump Laser Current Adjustment
Monitoring	Pump Laser Temperature
Computer Interface	SNMP
Display	Output Power Level, TEC Temperature
Alarms	Temperature and Current Threshold
Optical Connectors	FC/APC, SC/APC
Housing Dimensions	1RU 19"(W) x 14"(D) x 1.75"(H)