

DP-QPSK 100G LN Modulator

General Description



- 128Gbps (32Gbaud) Mach-Zehnder modulator for “DP-QPSK” transmission format
- 2 QPSK modulators and Polarization Beam Combiner are integrated in one package
- Low drive voltage: <math>< 7V (2V\pi)</math>
- Built-in monitor photo diodes for each polarization
- RoHS compliant
- OIF compliant



Specifications

Part Number	FTM7977HQA			
Parameter	Condition	Target spec		Unit
		Min	Max	
Operating Temperature	Case Temperature	-5	75	degC
Operating Wavelength	-	1530	1610	nm
Optical Bandwidth	-3dB Down	23.0	-	GHz
Insertion Loss	maximum transmission (Total power for each polarization)	-	13	dB
Polarization Dependent Loss	Loss (X) – Loss(Y) @ C-band	0.6 (Typ.)		dB
RF Drive Voltage	2 x V _{pi} @32Gbaud	-	7.0	V _{pp}
DC Extinction Ratio for parent MZI	-	22	-	dB
DC Extinction Ratio for Child MZI	-	20	-	dB
Optical Delay between X and Y		-5.2	-1.2	ps
Package Size (L x W x H)	90.5 x 13.2 x 7.0mm/3.56 x 0.52 x 0.27 inches			

RF performance

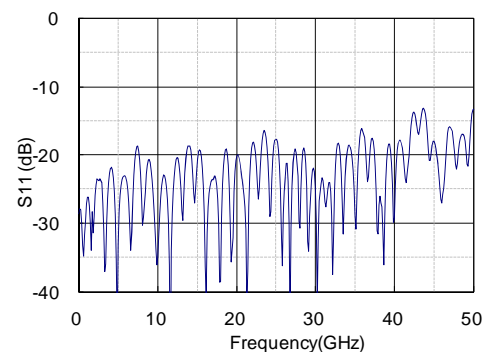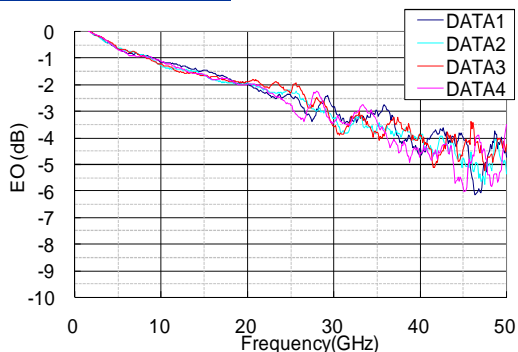

Fujitsu Optical Components Limited

Sales Department, Sales & Business Development Division

1-1 Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588, Japan (Company Mail No. H0913)

Tel: +81-44-754-3086, Fax: +81-44-754-3598

E-mail: optmdl-sales2@ml.css.fujitsu.com

<http://jp.fujitsu.com/foc/en/>

Specifications are subject to change without prior notice.