



DEVICE

CWDM Laser 1270 nm to 1610 nm, Coaxial DFB w/Fiber Output

OVERVIEW

The DFB-CX is a CWDM Coaxial DFB-LD for CWDM analog communication, CATV return-path, laboratory instrument, and R&D applications. This costeffective, high reliability DFB laser chip has a selectable wavelength with range between 1270 nm to 1610 nm. The versatile DFB-CX also features a built-in InGaAsP monitor photodiode, built-in optical isolator and 4-pin coaxial- pigtailed package, single mode coupling, and an FC/APC connector. Contact Optilab for more information.

FEATURES


- Selectable wavelength: 1270 nm to 1610 nm
- 4-PIN coaxial-pigtailed, single mode coupling
 Built-in optical isolator
- High Reliability DFB laser chip

- Built-in InGaAsP monitor photodiode

USE IN

- CWDM analog communication
- CATV transmission return-paths
- Laboratory instrument
- R&D applications

PIN OUT DIAGRAM




Type 2 Pinout

Pin 1	PD(-), LD(+)
Pin 2	Case
Pin 3	LD(-)
Pin 4	PD(+)

^{*}Type 1 Pinout is available upon request



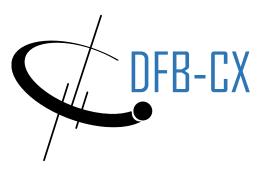

SPECIFICATIONS

ELECTRICAL

Threshold Current	8 mA typ.
Operating Current	100 mA max.
Analog Bandwidth	2.5 GHz typ. 30 mA
Monitor PD Current	50 uA min., 2 mA max.
Monitor PD Dard Current	10 nA max.
Photodiode Capacitance	10 pF min.
RF Passband Flatness	1.0 dB max.
Noise Power Ratio	40/14 min. @ 25 °C
Rise/Fall Time	500 ps max. to 3 Gb/s

OPTICAL

Center Wavelength	1270 nm to 1610 nm
	(See order option for more detail)
Wavelength Tolerance	+/- 2nm
Optical Isolation	20 dB
Optical Output Power	2, 4, 6, 8 mW
Laser Linewidth.	0.1 pm max.
Side Mode Suppression Ratio	35 dB typ.
Relative Intensity Noise	-145 dB/Hz typ.

MAXIMUM RATINGS

Laser Diode Reverse Voltage	2 V
Laser Diode Forward Current	150 mA
Monitor PD Reverse Voltage	15 V
Monitor PD Reverse Current	2 mA


MECHANICAL

-20 °C to +75 °C
-40 °C to +85 °C
1.2 V typ., 2.0 V max.
FC/APC, Other types available
SMF-28 with 900 um or 3 mm jacket
Coaxial with Fiber Pigtail





Mechanical Drawing

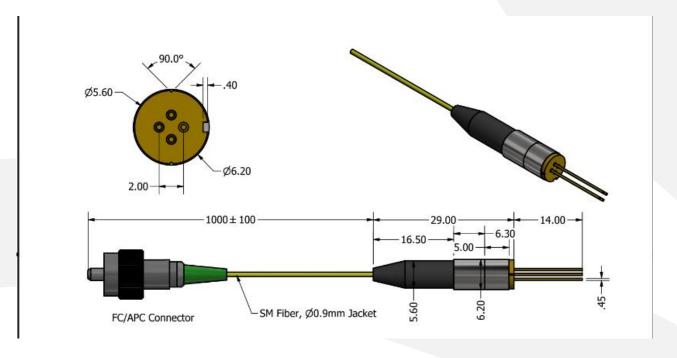

Module Version

• DFB-XXXX-CX-M



The DFB-XXXX-CX-M is a high performance integrated laser current and TEC controller, on-board heat sink. Designed specifically for DFB-CX.

Polarization Maintaining Version

• DFB-CX-PM-XXXX-YY



The DFB-CX-PM is a Polarization Maintaining version of CWDM Coaxial DFB-LD



ORDERING OPTIONS

DFB-CX-xxxx-yy

xxxx Wavelengths: See Table 1

yy Output Power: 2, 4, 6, 8 mW

Table 1

CWDM Wavelengths		
1270nm	1450nm	
1290nm	1470nm	
1310nm	1490nm	
1330nm	1510nm	
1350nm	1530nm	
1370nm	1550nm	
1390nm	1570nm	
1410nm	1590nm	
1430nm	1610nm	

